




ETNA




ETNA	BOARD	TEGULAR
	<p>Prelude XL²/TLX 24 mm Prelude Sixty²</p>	<p>Prelude XL²/TLX 24 mm Prelude Sixty²</p>
ETNA Perforated		
600 x 600 x 13 mm	3194 M	3196 M
600 x 1200 x 13 mm	3195 M	
ETNA Unperforated		
600 x 600 x 13 mm	3681 M	3683 M
600 x 1200 x 13 mm	3682 M	



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz	α_p
• ETNA Perforated									
0.45	0.45	0.35	0.45	0.50	0.50	0.55			
Sound Absorption Class = D									
• ETNA Unperforated									
0.15(L)	0.15	0.30	0.25	0.15	0.10	0.10	0.20		
Sound Absorption Class = E									

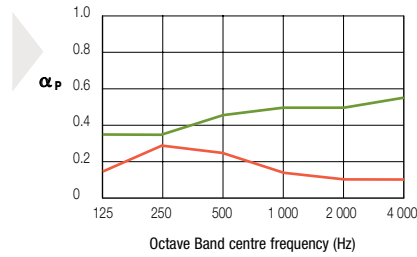

EN ISO 10848-2 & EN ISO 717-1

Dnfw
32 dB



EN 13501-1

EEA Euroclass A2-s1, d0



EN 12667 & ISO 8301


$\lambda = 0.06 \text{ W/m K}$



90 % RH



$\approx 3.6 \text{ kg/m}^2$



Please contact our Armstrong Technical Sales group for further details.

www.armstrong.eu